



MAN - ALPACA FIBRE ANALYSIS

Client

Lofty Ridge Farm
PO Box 71
Mount Pleasant SA 5235

Date Sample Taken -

Test No. LRF40207

Contact :- Micron Man

Our Phone (08)94181733
P.O. Box 1423
Bibra Lake W.A. 6965

Group ID. FULL GROUP T HIGH ON

Wool Growth - months

Age at Sample Date - months

Eartag : **SIERRA 2023**

Micron Deviation : **-0.4 mic**
>30 : **3.5 %**


Micron : **20.6 mic**
SD : **4.4 mic**
CV : **21.4 %**
CE : **3.0 %**
SF : **20.1 mic**
CF : **96.5 %**
CRV : **49.6 Deg/mm**
SDC : **36.6 Deg/mm**

Total Fibres counted : 3417

OFDA2000 Alpaca Calibration : Trim High ON
GCF @ 20 um : 0.6 um

Micron Profile Graph

Staple Length : **90.0 mm**
Finest Point From Tip : **85.0 mm**
Mean Fibre Ends : **20.8 mic**
Minimum Fibre Dia : **19.2 mic**
Maximum Fibre Dia : **24.1 mic**
Skin Fibre Dia : **19.2 mic**
Skin CV : **22.4 %**
SD Along : **1.5 mic**

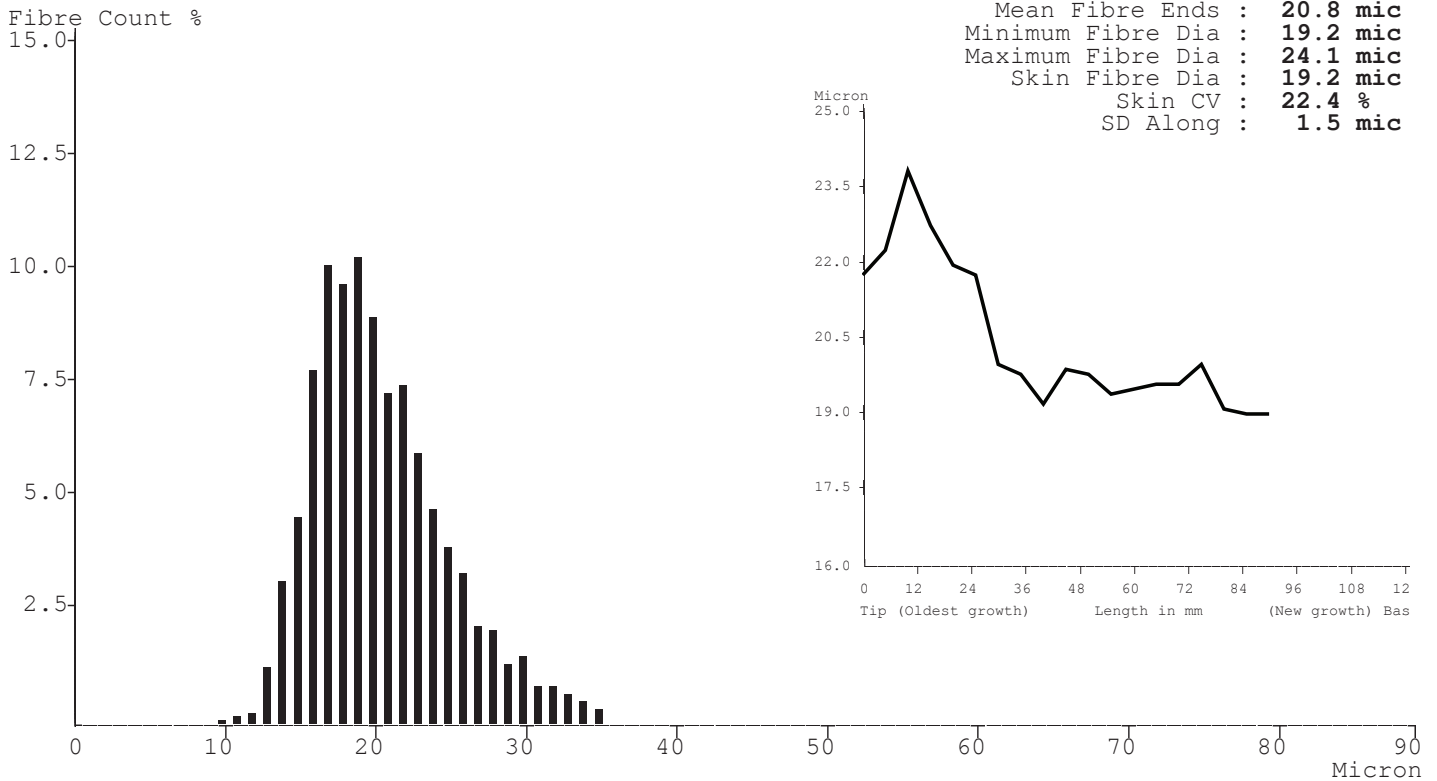

EXPLANATION OF TERMS

- FD : Overall average Fibre Diameter measured in micron.
- SD : Standard Deviation, measures the distance either side of the average fibre diameter where approx 2/3 of the fibre diameters lie.
- CV : Coefficient of Variation = SD as a percentage of the average micron
- CE : Coarse Edge. The percentage of fibres that lie over 10 microns greater than the average fibre diameter.
- CF : Comfort Factor. The percentage of fibres less than 30 microns
- SF : Spinning Fineness. Combine Micron & CV to a single number to represent the spinning quality expressed in microns.
- >30 : The percentage of fibres greater than 30 microns.
- CRV : Fibre Curvature is the average curvature or bending over one millimetre length. It is related to crimp frequency and is measured in degrees per millimetre (Dg/mm).
- SDC : Standard Deviation of Curvature is the variation of curvature for the above measurement. SDC is related to crimp definition and measured in degrees per millimetre (Dg/mm).
- TRIM : If sample is tested with Trim High ON, then the result is trimmed to 4 SD's above average FD. If sample average FD=22um and SD=5um then Trim High ON = 22+20=44um. Measurement above 44um is removed. Trim High OFF means no coarse tail trimming on the sample tested that gives a closer result to other instruments.
- GCF : Grease Correction Factor is the FD adjustment needed when measuring greasy Alpaca fibre - @ 20um-0.6um = 19.4um.